




## How to measure bricks.

Selkirk uses the cumulative measurement method as described in Australian Standard 4456.3.


1. Sample 20 bricks (it is important that the bricks are representative of the lot).
2. Remove anything which may have adhered to the surface of the bricks.
3. Place 20 bricks in a straight line on a level surface.
4. Measure the length, width and height.

### Length


(If unable to measure 20 bricks in a single row, measure two rows of 10 bricks).

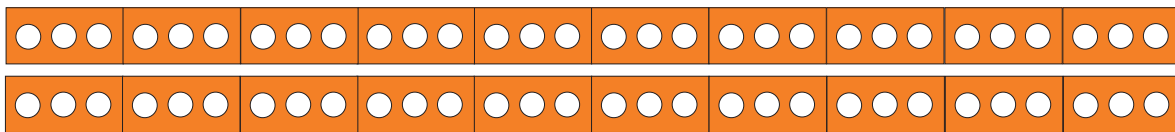

### Width



### Height



## Specification.

Australia Standard 4455 requires bricks to comply with 'DW' categories.

For standard 230 x 110 x 76mm brick, the allowable range over twenty bricks is shown below.

BRICK SPECIFICATION	TOLERANCE ALLOWANCE		
	L (mm)	W (mm)	H (mm)
<b>DW1</b>	+/- 90	+/- 50	+/- 50
<b>DW2</b>	+/- 60	+/- 40	+/- 40